


FONTAINE INFINITY FORKLIFT HAULER



When you come to a forklift in the road ... **haul it!**

This **factory built** solution is extremely durable and handles **multiple forklift brands** with ease.

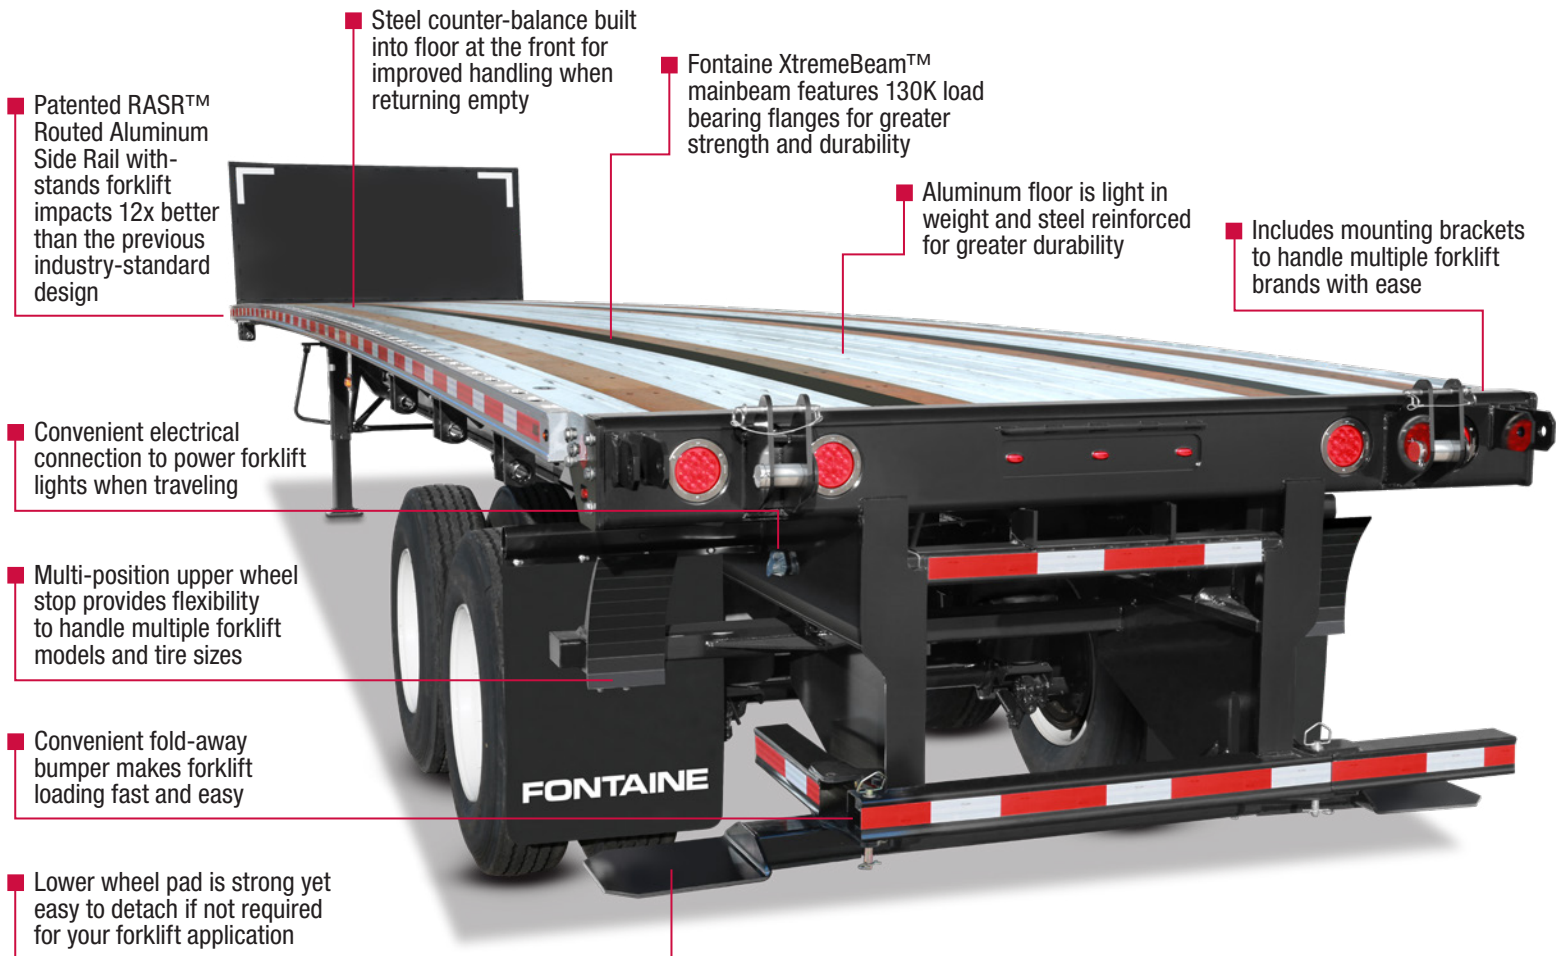

Not an aftermarket add-on kit!

Designed, engineered and factory manufactured by Fontaine, the industry leader.



www.fontainetrailer.com/forklift



Visit your local Fontaine
Trailer Dealer today!

See our forklift hauling solutions at
fontainetrailer.com/forklift




Fontaine Commercial Platform • 430 Letson Road • Haleyville, Alabama 35565 • 800-821-6535

NEW Fontaine Infinity Forklift Hauler Specifications

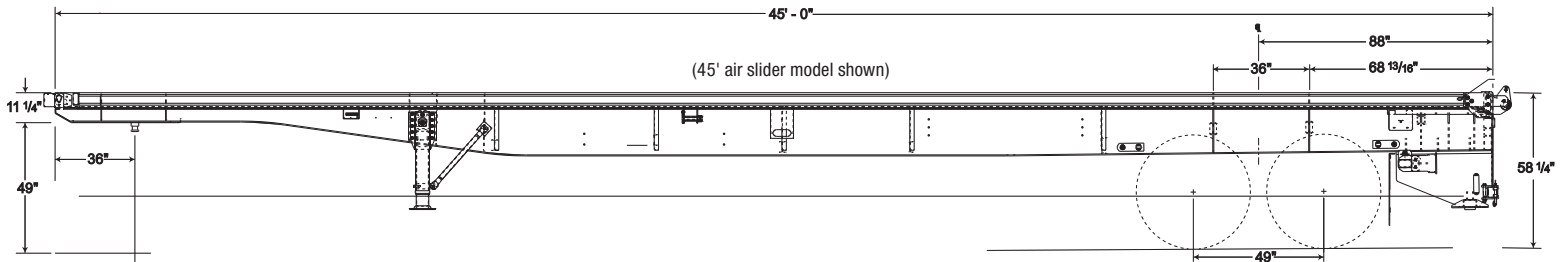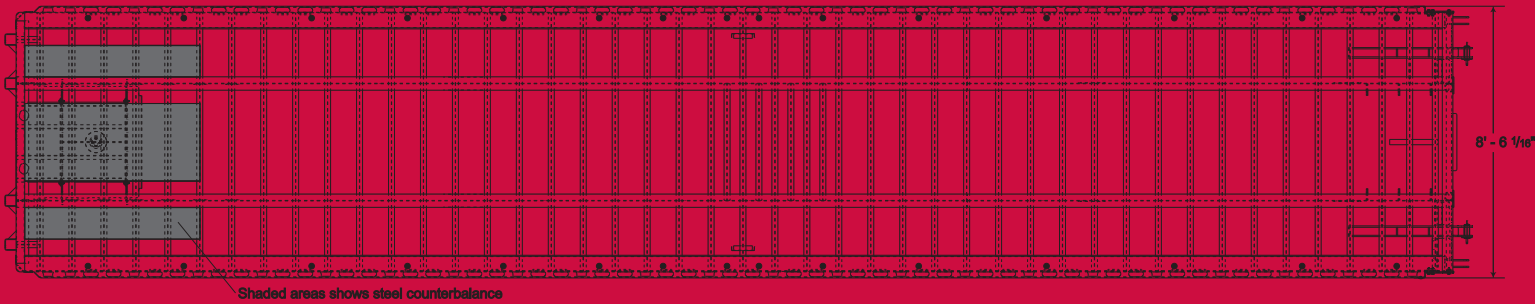

- Overall Length x Width:** 45' x 102" or 48' x 102"
- Suspension:** Sliding air tandem with 16" total adjustment or fixed closed tandem air
- Frame Rating:** 80,000 lbs distributed—GAWR and tire ratings determine legal payloads
- Flooring:** 1 1/8" aluminum with 4 apitong wood nailer strips
- Crossmembers:** 12" centers – 4" jr. I-steel
- Coil Package:** Single coil hauling package included
- Side Rails:** Exclusive Revolutionary RASR siderail technology—one piece routed aluminum designed for exceptional strength and impact resistance
- Chain Cargo Tie Downs:** available as an option
- Stake Pockets:** Routed aluminum on 24-inch centers (Two load securement openings between stake pockets)
- Rubrail:** Integrated with siderail
- Main Beams:** 130K load bearing flanges
- Kingpin:** Set at 30" with 49" loaded fifth wheel height
- Landing Gear:** OEM STANDARD
- Knee Braces:** Fabricated on approximately 60" centers
- Bulkhead Pockets:** Four steel DOT-type, welded to front
- Optional Bulkhead:** Steel DOT-type, 4-Post, no turnback, 48" high, approx 330 lbs, available as an option
- Axles:** 2 Axles with 49" spread
- Axle Spindle:** Tapered
- Brakes:** Spring brakes, auto slacks
- Air Line Filters:** Two Meritor In-line type installed
- ABS:** 4S/2M no cable or tool
- Hub and Drums:** 10-hole, hub-piloted, outboard cast drums (hubodometer available as an option)
- Wheel Ends:** Grease in hubs; 5-year wheel end warranty
- Wheels:** 22.5 x 8.25 steel disc pre-painted white (optional aluminum wheels available)
- Tires:** 295/75R 22.5 14PR – OEM STANDARD (inflation system and spare tire carrier available as options)
- Suspension Detail:** Closed tandem air ride (fixed), Hendrickson AANT23K Intraxx or Sliding Tandem Air Ride with 16" total adjustment, Hendrickson AAZNT46K Intraxx
- Auto Glad Hand Dump:** Installed
- Front Corners:** Tapered steel

- Electrical System:** LED sealed system: 3 lights/side, 2 lights/side on rear – STANDARD
- Paint:** Black urethane on steel parts with Infinity decals – STANDARD
- Conspicuity Tape:** Per NHTSA specs – installed in recess on rubrails
- Bumper:** Weld-on type – meets underide requirements, painted steel
- Mudflaps:** One set OEM STANDARD
- Winch Track:** Full length integrated double L type aluminum on both sides – STANDARD
- Sliding Winches:** 12: 6 each side; sliding rope hook/winch strap hook retainers – STANDARD (27' and 30' winch straps available as an option)
- VIN Plate:** Bilingual US/Canadian VIN plate
- Rear Forklift Design:** Factory installed Fontaine "Universal" forklift system accepts Moffett, Princeton and Navigator brand forklifts; Dealer and Customer responsible for final adjustment of wheel stops and additional mounting hardware (if needed) to accommodate the specific forklift model being transported.
- Counterweights:** (One) 48" x 38.75" and (Two) 48" x 18.5" steel counterweights replace 4 ft of aluminum floor at front of trailer. Adds approx 1,112 lbs combined weight. Note that the optional bulkhead adds approx 330 lbs to the front of the trailer.
- Registration Holder:** OEM STANDARD installed
- Tool boxes:** Available as an option

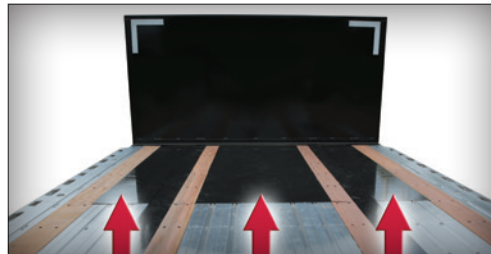

Steel counterweights are built into the front floor to balance the forklift weight when returning empty. For optimum performance make sure the counterbalance and 5th wheel spec are correct for your application.

Counterweight recommendations by forklift model

Model	Weight	Center of Gravity	Estimated Counterweight Requirements*
Moffett Semi Trailer Forklifts			
M4 36.1	3500	13	475
M4 36-3	3820	16	631
M4 45-3P	4420	11	822
M5 NX 50-3	5290	15.5	1224
M5 NX 50-3P	6140	14	1547
M5 NX 50-4	5990	15	1501
M5 NX 50-4P	6990	16	1923
M8 55.4	7120	17	1993
M8 55.3P	7720	22	2332
M8 55.4P	8670	22	2733
M8 55-3	6340	19	1704
M8 70-3	6170	17.5	1611
M8 80-4	8390	17.5	2524
M8 80-3	6610	19	1816
M9 55-3 LP	6625	17.5	1798
M9 60-3	7230	18	2056
Princeton Semi Trailer Forklifts			
PB36	3500	17	585
PB45 STM	4520	14.5	981
PB45	5290	15.5	1308
PB55+	6400	26.5	1935
PB55+4-way	7120	17	2087
PB55X+	7240	30	2364
PB70+	6700	27	2074
PB80+	6970	27	2193
Navigator Semi Trailer Forklifts			
RT- 4000	3900	18	3251
RT-5000	5100	18	3944
RT-5500	5800	25.5	4453
RT-6500	7090	25.5	5221

*Counterweight estimates are based on forklift OEM's recommendations for trailer 5th wheel weight distribution when unladen with forklift attached to trailer. Consult with forklift provider to verify proper counterbalance. Consult with truck OEM to verify proper 5th wheel specification.



See our forklift hauling solutions at fontainetrailer.com/forklift



www.fontainetrailer.com/forklift

Visit your local Fontaine Trailer Dealer today!

Fontaine Commercial Platform • 430 Letson Road • Haleyville, Alabama 35565 • 800-821-6535